

1.0Amp Fast Recovery Rectifiers


BA157~BA159

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-41 molded plastic body
 Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes cathode end
 Mounting Position: Any
 Weight : 0.012 ounce, 0.33 grams

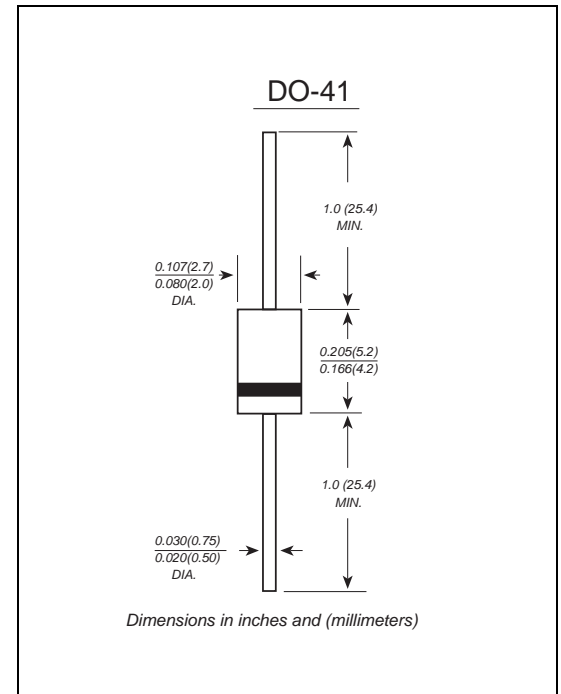

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	BA157	BA158	BA159	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	400	600	1000	VOLTS
Maximum RMS voltage	V_{RMS}	280	420	700	VOLTS
Maximum DC blocking voltage	V_{DC}	400	600	1000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0			Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30.0			Amps
Maximum instantaneous forward voltage at 1.0A	V_F	1.3			Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	5.0 50.0			μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	150	250	500	ns
Typical junction capacitance (NOTE 2)	C_J	15.0			pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	50.0			$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150			$^\circ\text{C}$

Note 1. Reverse recovery condition $I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Ratings And Characteristic Curves

BA157 THRU BA159

FIG. 1- FORWARD CURRENT DERATING CURVE

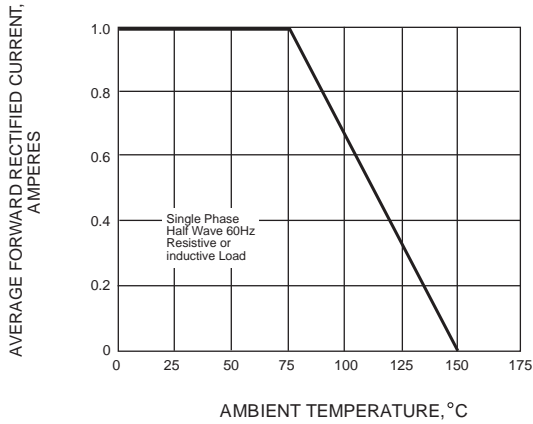


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

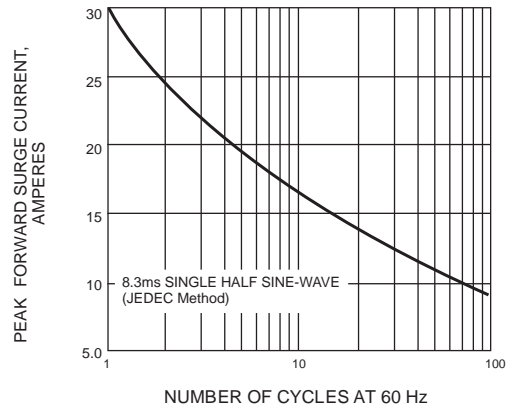


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

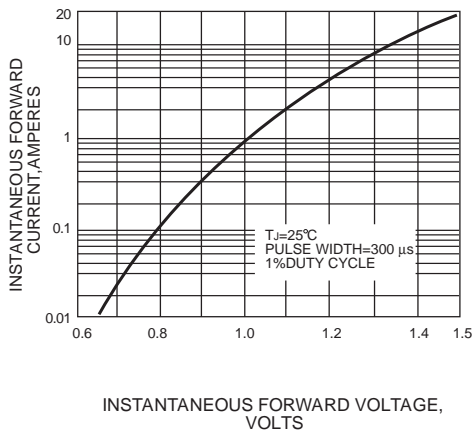


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

